


B1 AVENGER M50 - MANUAL

MANUAL SURFACE SET SWING ARM - MODEL DACB-PAM-1200-S

CRASH TESTED TO ASTM F2656-07 - M50/P3 RATED - STOPS 15,000 LB. VEHICLE AT 50 MPH IMPACT

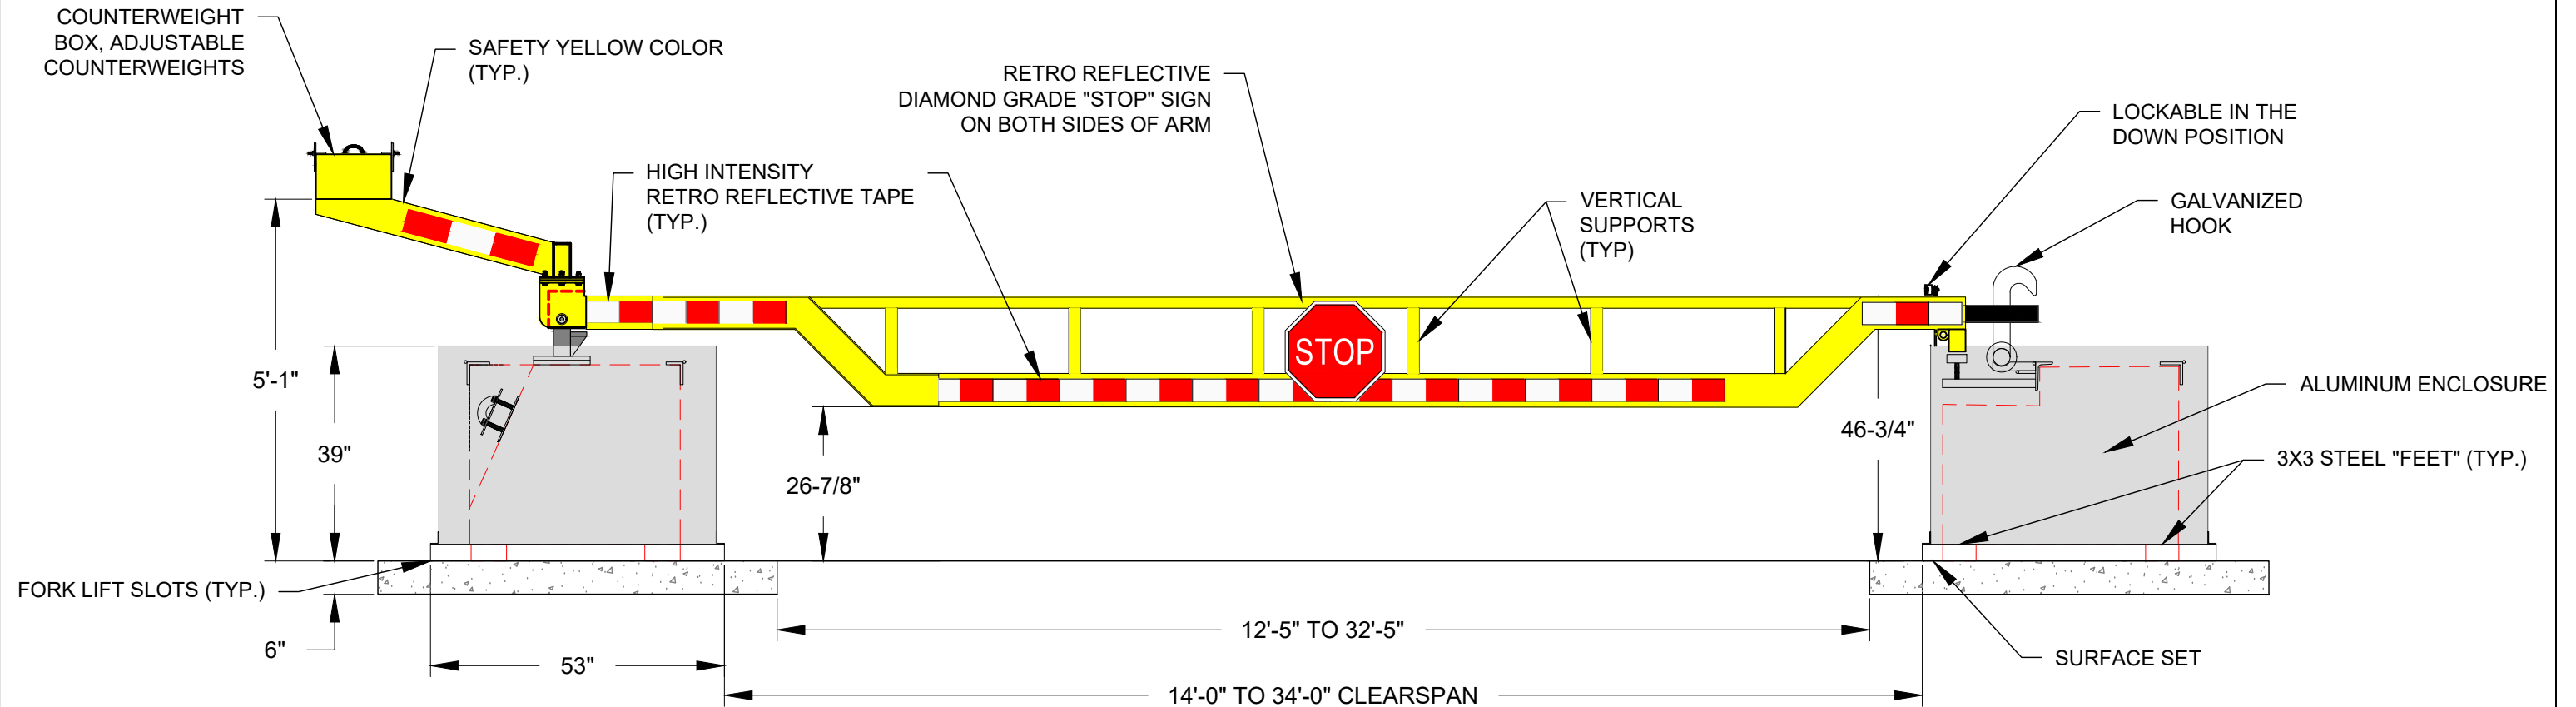

KEY CAPABILITIES:

1. BARRIER IS DELIVERED PREFABRICATED AND PRE ASSEMBLED, READY TO OFF-LOAD AND SURFACE SET.
2. BARRIER ARM SWINGS HORIZONTALLY(SEE SHEET 2 OF 2)
3. MANUAL LOCKING IN THE CLOSED POSITION.
4. BARRIER ARM IS HIGHLY VISIBLE WITH REFLECTIVE TAPE.
5. MOBILE BARRIER CAN BE EASILY RELOCATED USING A FORKLIFT WITHOUT REQUIRING DISASSEMBLY.
6. BARRIER PROVIDES BI-DIRECTIONAL STOPPING CAPABILITY (STOPS INBOUND AND OUTBOUND VEHICLE IMPACTS).
7. STAINLESS STEEL, HOT DIPPED GALVANIZED STEEL, AND ALUMINUM MATERIALS USED.
8. HOOK SIDE AND PIVOT SIDE OF BARRIER CAN BE REVERSED.
9. MODULAR COMPONENTS THAT CAN BE DISCONNECTED AND REPLACED, IF BARRIER IS IMPACTED.



BARRIER1 SYSTEMS, LLC

8015 THORNDIKE ROAD
GREENSBORO, NC 27409
(336) 617-8478 www.barrier1.com
sales@barrier1.com

PATENT PROTECTED

THE DRAWINGS AND INFORMATION CONTAINED HEREIN ARE PROPRIETARY AND CONFIDENTIAL, AND ARE AUTHORIZED ONLY FOR USE FOR WORK ASSOCIATED WITH BARRIER1 SYSTEMS, LLC ALL RIGHTS RESERVED.

ELEVATION VIEW
(LOWERED)

SWING ARM

SHEET: 1 OF 2

20230104-10-W

SCALE: N.T.S.

B1 AVENGER M50 - MANUAL



MANUAL SURFACE SET SWING ARM - MODEL DACB-PAM-1200-S

CRASH TESTED TO ASTM F2656-07 - M50/P3 RATED - STOPS 15,000 LB. VEHICLE AT 50 MPH IMPACT


NOTE

1. CONCRETE PADS ARE RECOMMENDED (PROVIDED BY OTHERS)

**RESTING BLOCK
(1 PROVIDED PER ARM)**

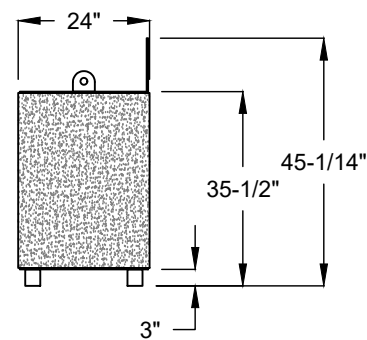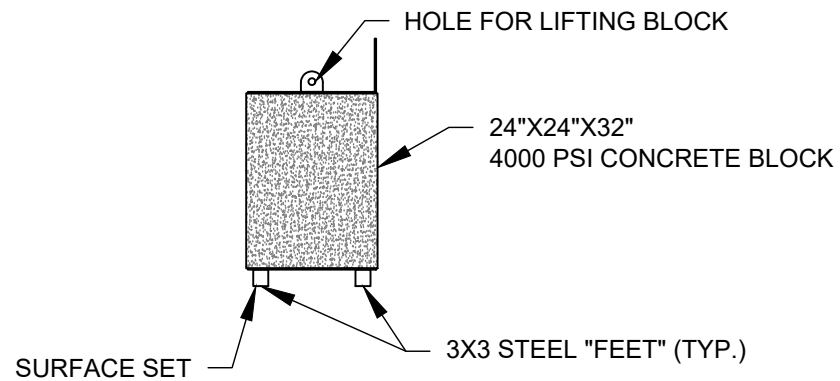

ROTATE BARRIER ARM HORIZONTALLY
90 DEGREES IN EITHER
DIRECTION BY WALKING IT AROUND
(180 DEGREES OF ROTATION)

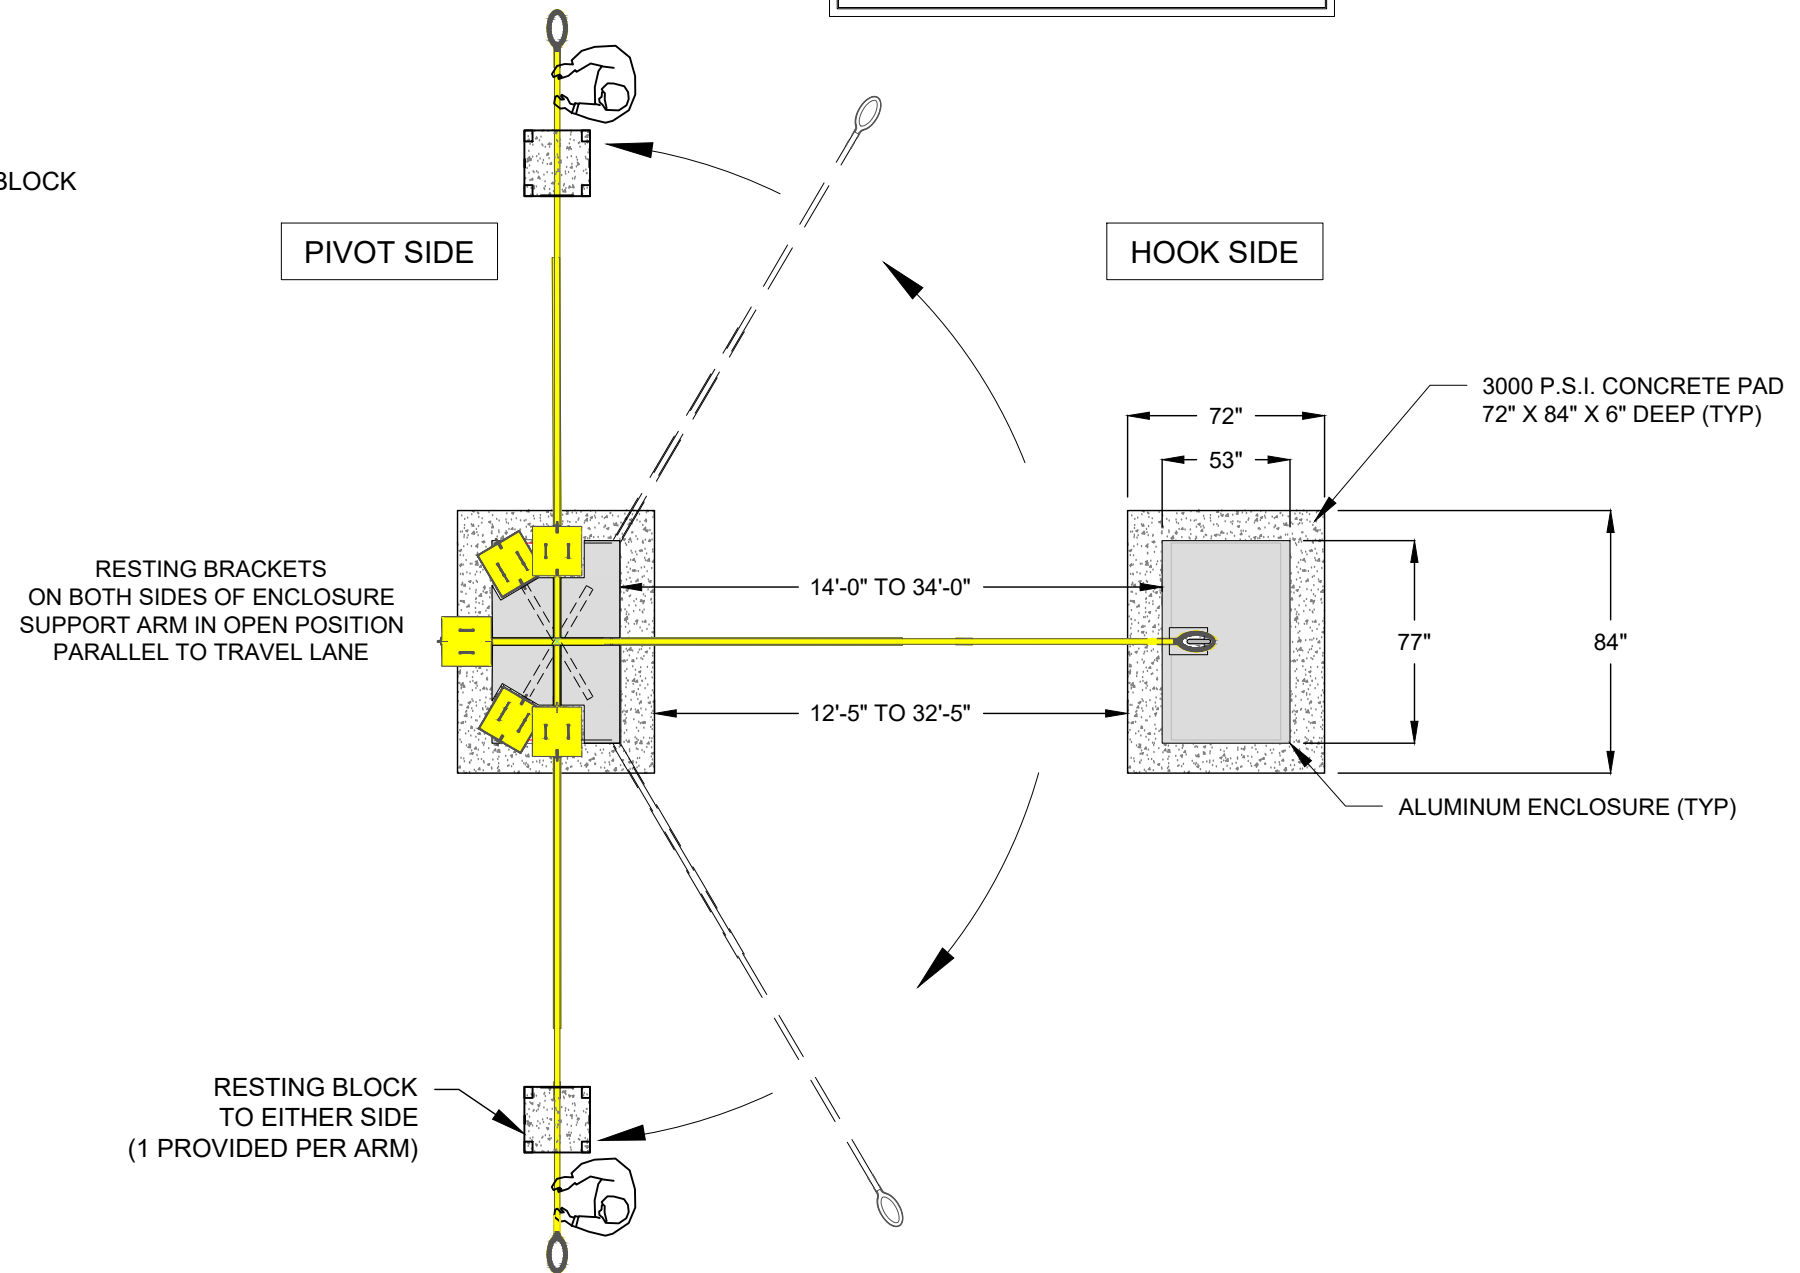

BARRIER1 SYSTEMS, LLC

8015 THORNDIKE ROAD
GREENSBORO, NC 27409
(336) 617-8478 www.barrier1.com
sales@barrier1.com

PATENT PROTECTED

THE DRAWINGS AND INFORMATION CONTAINED HEREIN ARE
PROPRIETARY AND CONFIDENTIAL, AND ARE AUTHORIZED ONLY
FOR USE FOR WORK ASSOCIATED WITH BARRIER1 SYSTEMS, LLC
ALL RIGHTS RESERVED.

PLAN VIEW

SWING ARM

SHEET: 2 OF 2

20230104-10-W

SCALE: N.T.S.